



<Pic.A>



<Pic.B>



Broken and damaged Tips

- How to check the crack on tip body:
1. Screw twice to handpiece <Pic.A>
 2. Check every side of tip body with tilting.

(Tip should be replace after maximum 10 times usage.)




<Pic.C>

If it is not dried fully after cleaning tip. it causes for rust in screw like <Pic.C>..




<Pic.D>

<Pic.D> is the case when the tip is badly worn by overuse.
The mail unit is possible not to recognize the tip.
The tip might not connect rightly with handpiece.

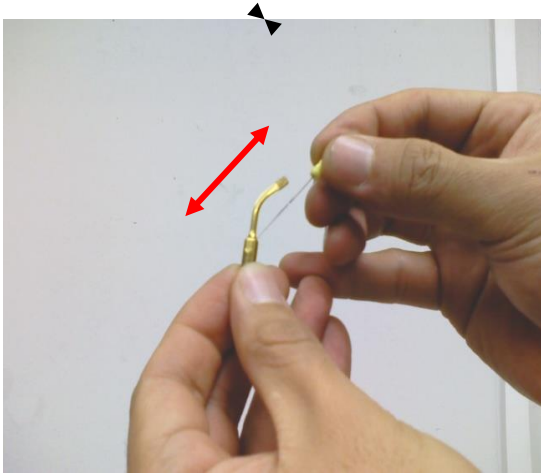

<Pic. E>

In the case of clogging the saline hole of tip or hadpiece, clean the hole like <Pic.E>, <Pic.F>.

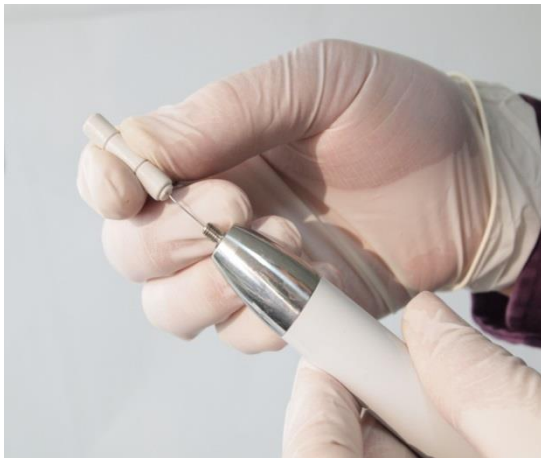

<Pic. F>